


REV	Date	Description
X1	2023/09/08	New issue

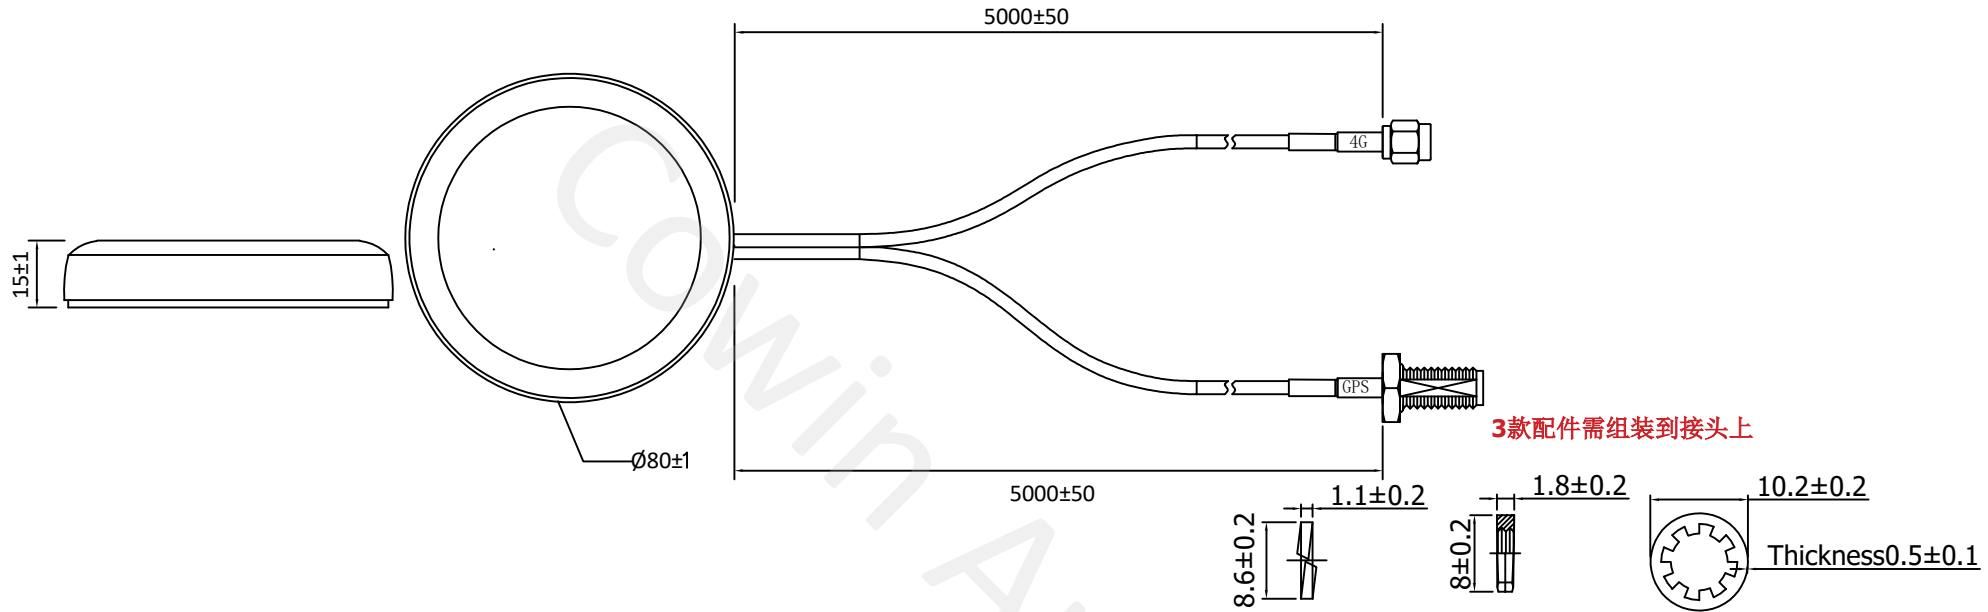

Separately equipped with  
1PCS 3M double-sided  
adhesive

Specification(Free Test):  
Frequency Range: 698-960MHZ/1710-2700MHZ  
Impedance: 50Ω  
V.S.W.R: ≤1.5  
Peak Gain =6DBI

Specification(Free Test):  
Frequency Range: 1560MHz -1605MHz  
Impedance: 50Ω  
V.S.W.R: ≤1.5  
Peak Gain =28DBI

NO	Name	Description	Q'TY	Remark
11	3M double-sided adhesive	79*1MM	2	
10	Nut	Nickel plated brass	1	
9	Stud	Nickel plated brass	1	
8	Lower cover	Black ABS	1	
7	Shell	Black ABS	1	
6	Tube	φ4.0mm ordinary White	2	
5	Cable	RG174	2	
4	Ceramic antenna	25*25*4MM	1	
3	PCB	FR4	1	
2	Connector 2	SMA Female	1	
1	Connector 1	SMA Male	1	

XX.	±5.0	Approved	Customer		
X.	±3.0		Part NO.		
.X	±1.0	Checked	Part name		Combined antenna
.XX	±0.2		CW P/NO.		CW-ZH-0012
.XXX	±0.1	Drawing	REV	Unit	File :
			X1	m/m	Sheet : 1/1

